

WATCHDOG^{NXT}60

How to Change the Control Board




Tools:

- Phillips Head Screwdriver
- **-OR-**
- #2 Phillips Drill (*Optional*)
- Replacement Control Board


1. Remove the side panel so you have access to the control board (the side with the sensor vents). For more details, check out the “How to Remove the Side Panels” Guide.




2. Remove the two screws from the control board cover and lift off the cover.

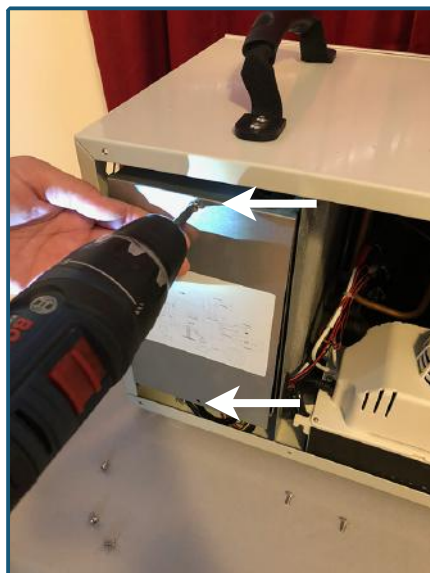

3. At this point you will need to unplug the wires from the control board.

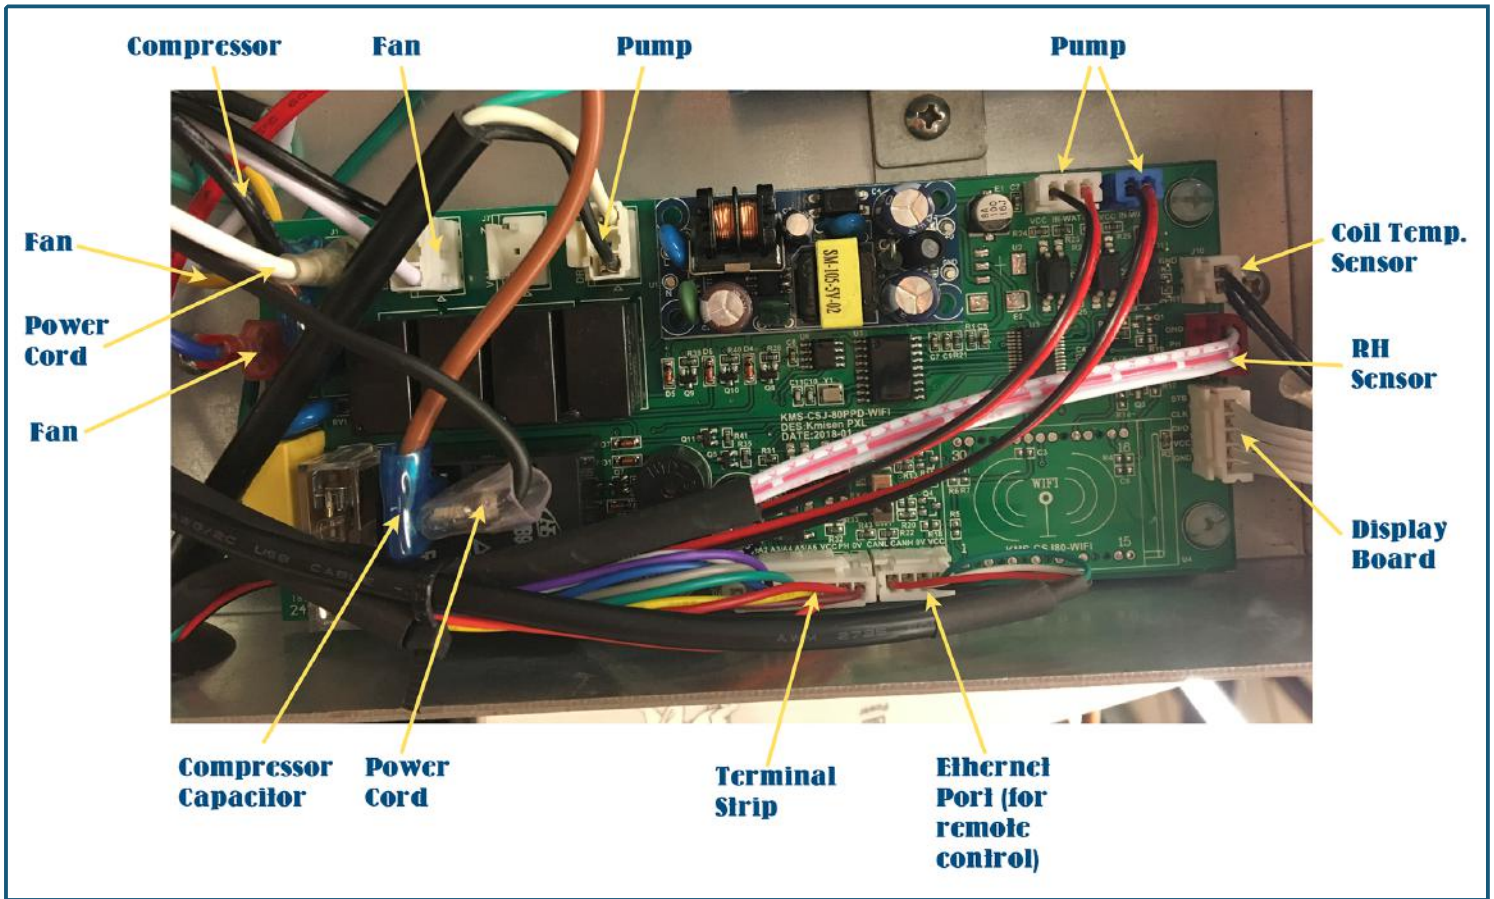

4. Next, use a screwdriver to remove the 4 screws holding the control board in place (one in each corner).

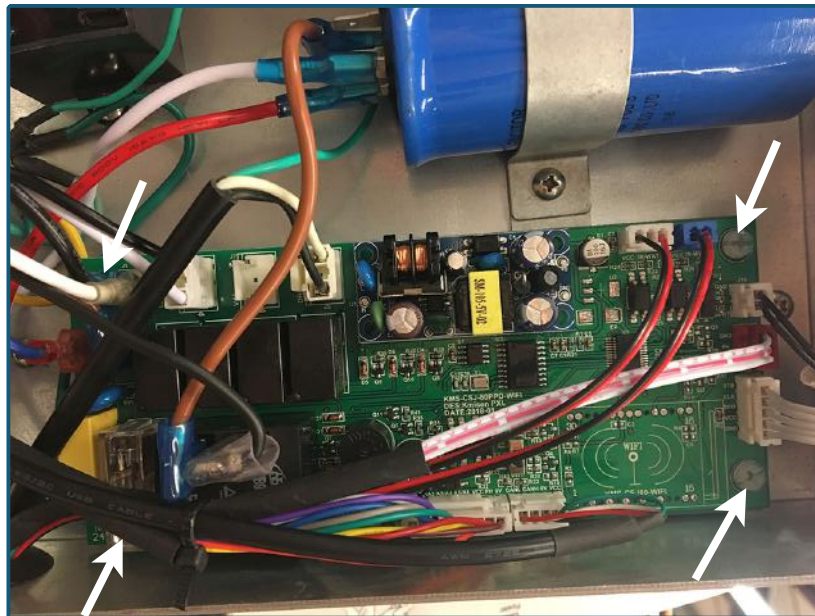

5. Finally, lift the control board out and set aside. Insert the replacement control board. Reverse the process to install the board- insert the screws, rewire, and replace control board cover.

