

# WATCHDOG<sup>NXT</sup>


## How to Change the Display



### Tools Needed:

- Phillips Head Screwdriver or #2 Phillips Drill
- Replacement Display Board

1. First, remove the 2 filters and set them aside.

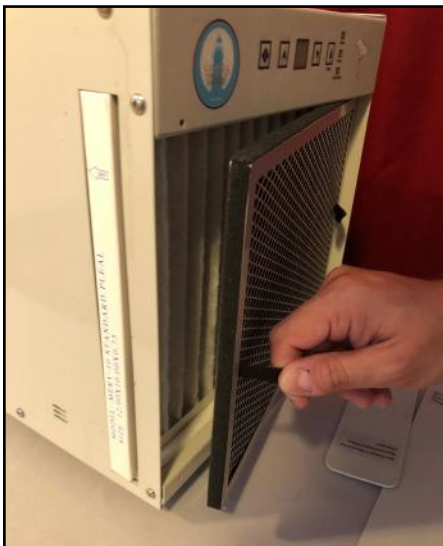

2. Remove the (4) screws on the side of the display. There will be 2 screws on each side.




3. Next, remove the two screws on the top of the display, using your hand to keep the display from falling out.



4. Carefully lift the display away from the cabinet and turn it over so you can see the display board. Keep in mind the display will be still be connected by wires to the dehumidifier.



5. Unplug the display cable.

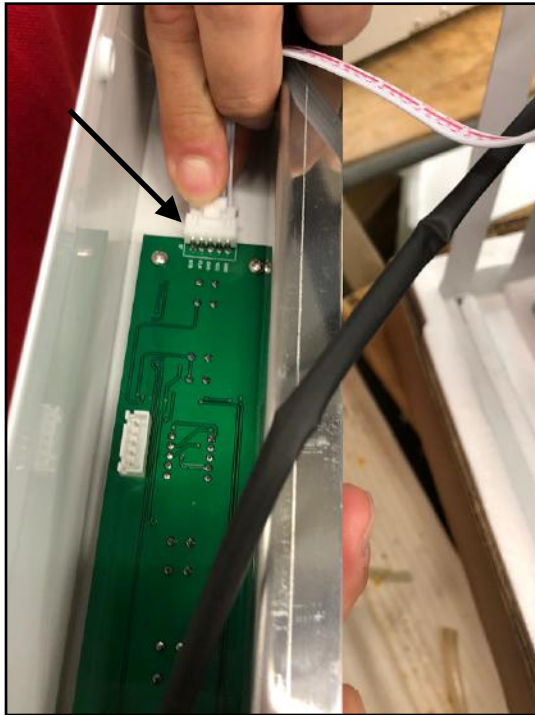

6. Remove the four screws holding the display board in place (2 on each side).



7. Screw in the new display board and reverse the process.







