

# WATCHDOG 550 GUIDE: *How to Open*




## **Tools:**

Phillips Head Screwdriver


**-or-**

#2 Phillips Drill


1. First, carefully slide the filter out of the back of the dehumidifier. Set the filter aside.

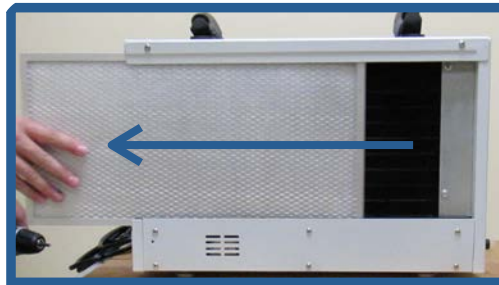


2. Use the screwdriver or drill, to remove the two screws holding the cabinet door in place (one screw on each side of the door).

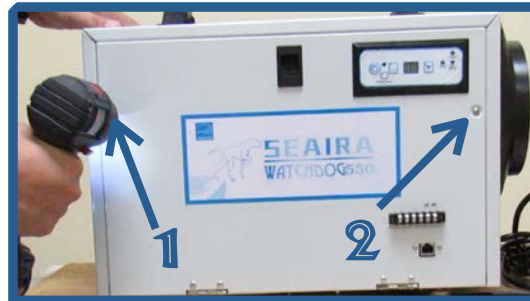


3. Next, use your hand to open the safety latch in the center of the door, and lower the cabinet door.

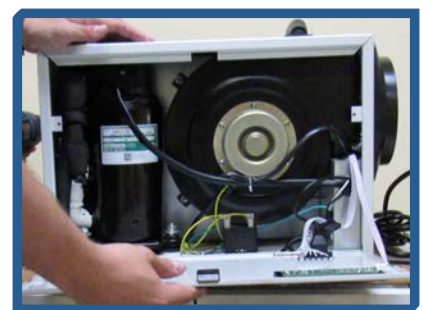

4. At this point, you can begin removing the screws on the cabinet. Start by removing the 3 screws on the drain hose side of the cabinet.

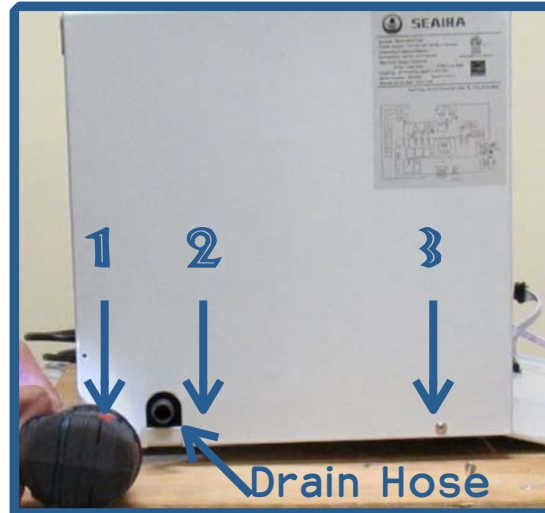

5. After that, remove the 2 screws on the duct adapter side of the cabinet.

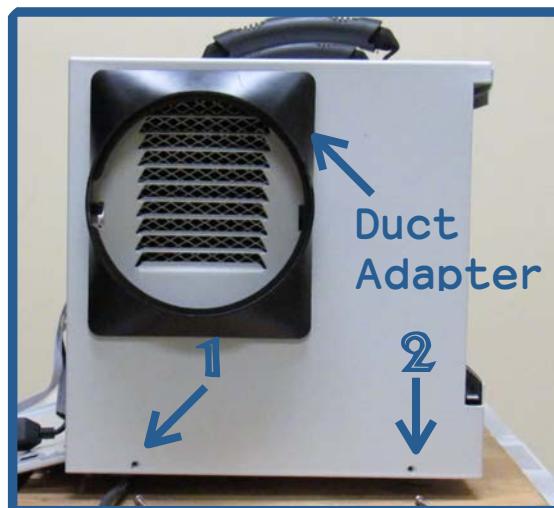

6. Finally, gently lift the cover off the dehumidifier.

